


MT-1023&MT-1024 Splicing Tray



Quick Details:

1. Name: 12-24 core splicing tray
2. Material: virgin ABS
3. Dimension: 154.3x91.9x10mm (with cover)
4. Net weight: 60g/pcs
5. Mounting hole diameter: 6mm
6. Color: white or grey
7. Certification: ISO9001

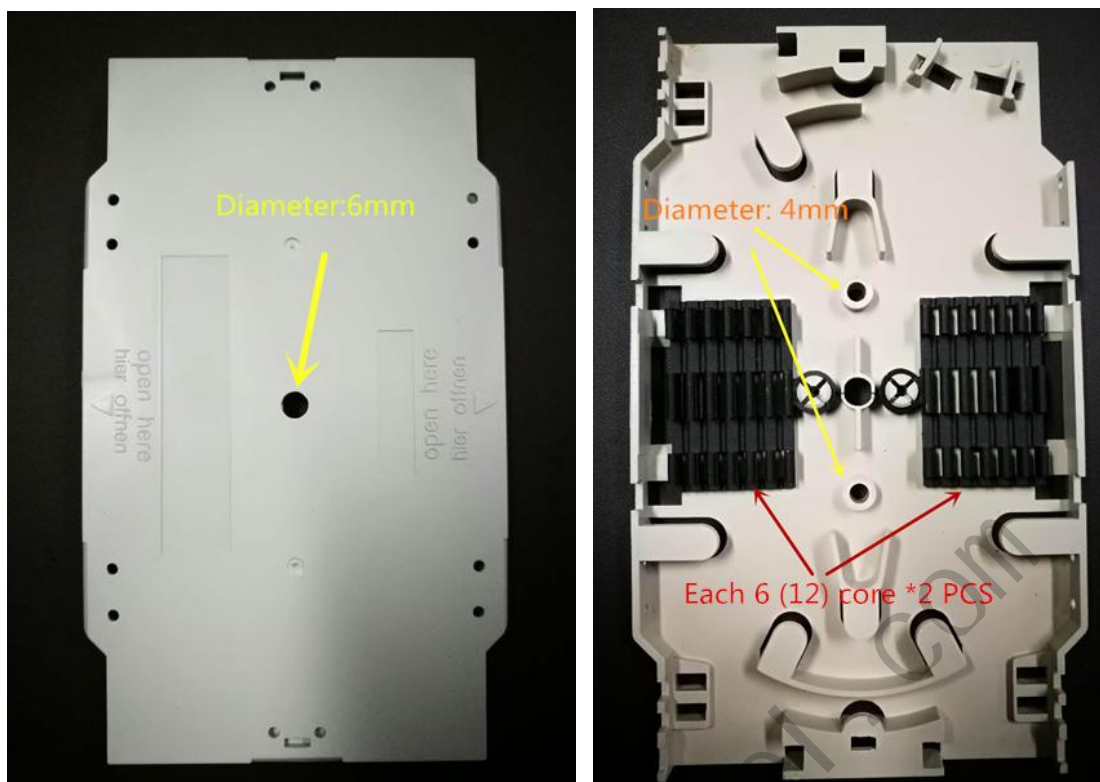

Description:

The Fiber Optic Splice Tray is a devices of connection cable the introduction of fiber optic splice tray, and welding, including final packaging. For fiber splicing, branch, cover can be flipped, the disc can be superimposed, expand capacity, install, extremely easy to use. It is an important part of the cable splice closure, fiber optic terminal box, fiber distribution boxes, cable junction boxes and other equipment

Specifications:

Material	ABS
Sealing performance	Remain unchanged for 72 hours on pressure 70kpa
Ambient temperature	-40°C+55°C
Atmospheric pressure environment	70kpa-106kpa
Tensile strength	>1000N
Compressive strength	withstand 2000N/10Cm ² in 1min
Max volum	12/24 core per pcs