

MT-4004 50 Port voice Patch Panel



Quick Details:

1. 50 ports shielded type Patch Panel, CAT.5E, CAT.6 can be chosen.
2. Mount on 19 inch rack, Height: 1U.
3. IDC option: Krone IDC, 110IDC, Dual IDC, Can be chosen. Installed with screw, easy to change in case one is failed.
4. IDC contract material: phosphor bronze with tin plating over nickel
5. Thickness of gold plating: 3u", 6 u", 15u", 30 u", 50 u"
6. With port no. printing, not easily moved.
7. Meet or exceed the requirement of ANSI /TIA/EIA 568B.2, UL listed, CE certified. Pass the Fluke test.
8. Include earth line and cable management
9. Black and Grey Color can be chosen.

Details of Material:

Panel: Cold rolling steel with static plastic spraying

Designation-strip holder: ABS (UL94V-0)

Jack: PBT (UL94V-0)

IDC: PC (UL94V-0)

Module Connector: Phosphor Bronze with Gold Plating

IDC Connector pin: Phosphor Bronze with Silver plating

IDC Connector: Insulation slicing of 22 to 26 AWG

Weight: 1.5kg

Size: 48.5*4.5*17cm

Cat.5e and Cat6 character is available for this function.

Description:


The patch panel is offered universal wiring both T568A and T568B, color Coded TIA/EIA 568a and 568b Wiring for Easy Installation. Termination accepts 22, 24 26 AWG (0.64, 0.5 and 0.4) solid wires. Meet or exceed the requirement of ANSI /TIA/EIA 568B.2. We will do the Fluke test before sending you our products.

Each patch panel will be packed firstly with a plastic bag and then a firm inner box. Colorful inner box OEM is available. Usually we use a natural brown box for most of the clients. The patch panel we sell annual amount above 10000peices over the world.

Specifications:

Melontel Voice and Data Patch panel	
IDC	Silver plated in the surface of the contact conductor
Insulation resistance	1000 Mohms minimum
Copper conductor	0.4-0.7mm(22-26 AWG Solid wire)
Contact resistance	7 Mohms maximum
Dielectric intensity	AC 1000V 50Hz or 60Hz in 60s
Storage Temperature	-40 to 70° C
Operating Temperature	-10 to 60° C
Relative Humidity	95%, Noncondtion
Design to mount	Any standard 19" rack or cabinet (and 10inch type)
Space saving	High-density 1U (24 port, 48port, 25port, 50port available).

Dimension & Colors

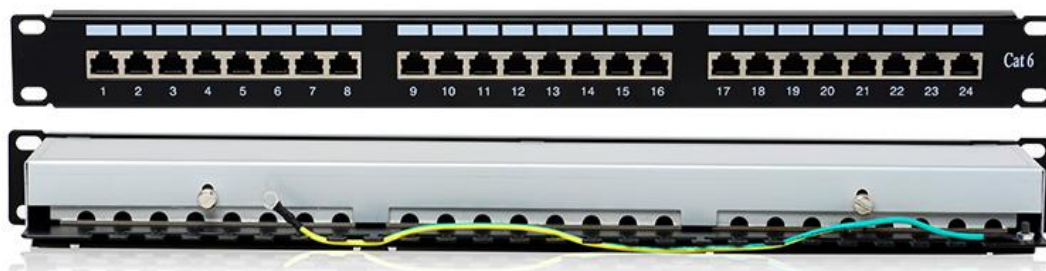


1. Black body+ Black Cover
2. Black body+ Grey Cover
3. Grey body+ Grey Cover


More Photos:



hofi ber@me@ofiber.com

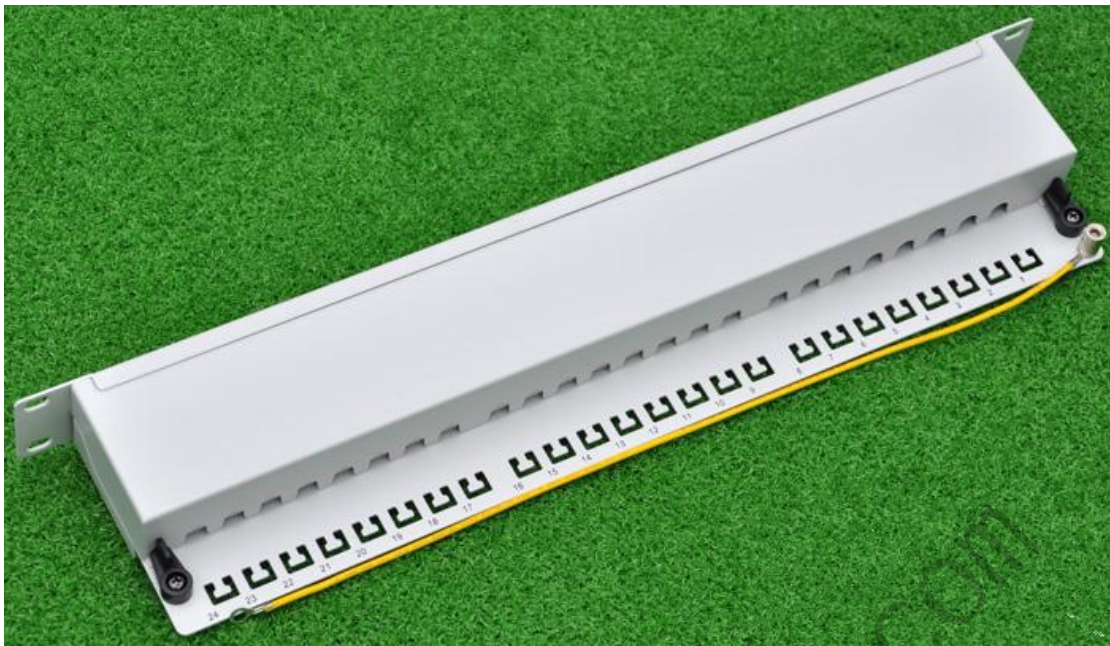

hofiber.com

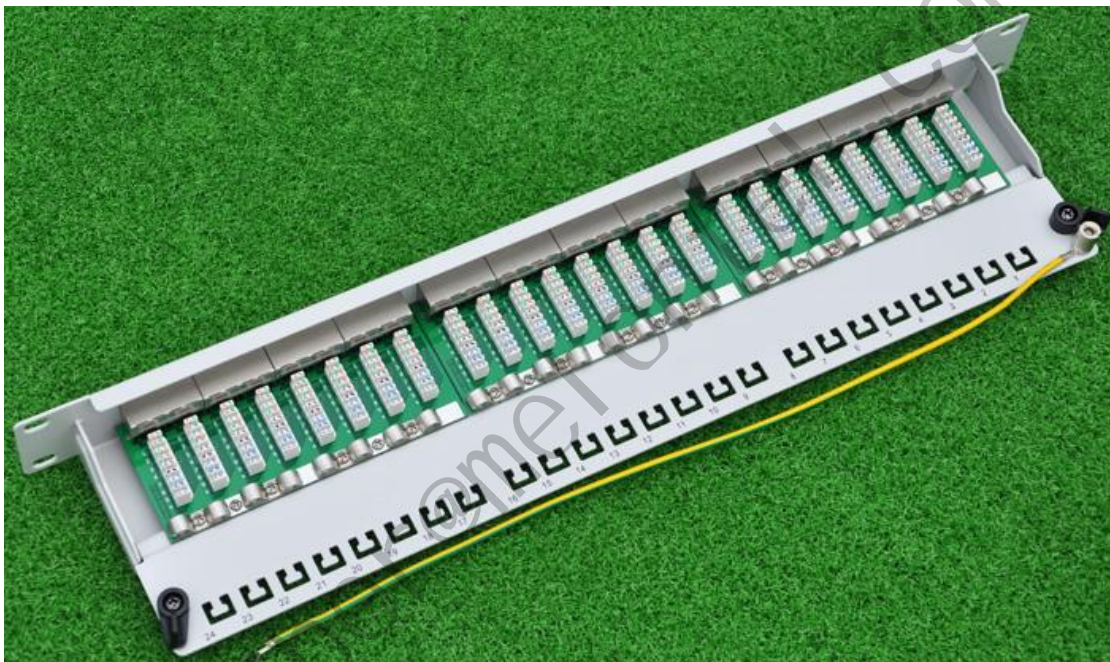



**With Print Label or Not ?
Both OK!!**



Welcome OEM !!

