

MT-1501 12,24,48,96 Core Fiber Optic Splicing Enclosure



Description:

1. Dimension:460x180x110mm
2. Capacity: with 4 splicing tray, each tray 12 core
3. Port type:2 input, 2 output
4. Material:ABS or PPR or PC
5. NW:2.1KG
6. Certification:ISO9001



Features:

- Advanced internal structure design
- Easy to re-enter, it never requires re-entry tool it
- The closure is spacious enough for winding and storing fibers
- Fiber Optic Splice tray (FOSTs) are design in Slide-in-lock and its opening angle is about 90°
- The curved diameter with international standard
- Easy and fat to increase and reduce FOSTs
- Straight-through fir uncutting and branching for cutting the fiber
- Lay adapters suit for FTTH and easy to operate

- Voltage resistance: 15KV (DC).
- Tensile seal: after the product is inflated, it can withstand the axial tension of 2000N.
- Impact seal: after the product is inflated, can withstand the shock energy of 16N*m (Newton * meters) three times,
- The product has no crack, no leak.
- The boxes of the products are made of high quality engineering plastics (PC), and the external fastener and components are made of high-quality stainless steel materials. The product USES two pressure cable technology to ensure that the inside of the box has no added attenuation.
- The product has the function of the electrical connection of the cable.
- The product has many multiplexing and amplifies function.
- The enclosure can be filled with valve mouth * for easy sealing of the juniper check and measurement of air pressure.
- The enclosure may be equipped with an earth extractor.

Working environment:

- Ambient temperature: to 40 °C to + 65°C
- Relative humidity: 85%
- Protection level (EN60529) : IP54, IP58.

Applications

- Suitable for bunchy fibers
- Aerial, underground, wall-mounting, hand hole-mounting and duct-mounting




Splicing Tray:

High Quality Splicing Tray

Material: Flame retardant ABS

Dimension: 165*103*12mm

Capacity: 24 Core

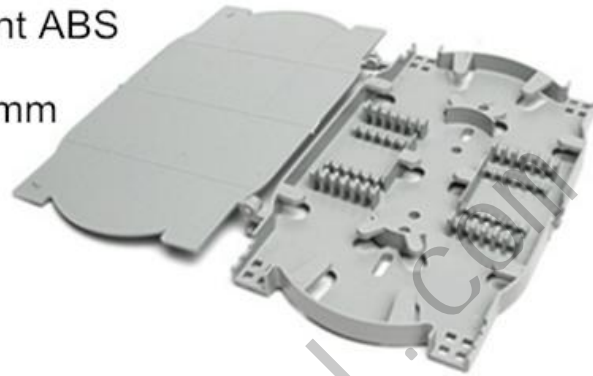

| Capacity | 12 core | 24 core | 36 core | 48 core | 72 core | 96 core | 144 core |
|-------------|---------|---------|---------|---------|---------|---------|----------|
| QTY of tray | 1 pcs | 1 pcs | 2 pcs | 2 pcs | 3 pcs | 4 pcs | 6 pcs |

Standard Accessories

