

MT-1552 24~96 CORE FIBER OPTIC SPLICE CLOSURE



Quick Details:

01. Product Name : 24~96 core fiber optic splicing closure
02. Place of Origin : China
03. Model No : MT- 1552
04. Packing Dimension : 420x140x140MM
05. Net Weight : 2kg(with accessories)
06. Gross Weight:19kg(8pcs/carton) CTN:82*45*46CM
07. Material: PPR or ABS or PC
08. Certification: ISO9001
09. Sealing: Heat shrink or mechanical



mechanical



Heat shrink

Description :

- Advanced internal structure design
- Easy to re-enter, it never requires re-entry tool it
- The closure is spacious enough for winding and storing fibers
- Fiber Optic Splice tray (FOSTs) are design in Slide-in-lock and its opening angle is about 90°
- The curved diameter with international standard
- Easy and fat to increase and reduce FOSTs
- Straight-through fir uncutting and branching for cutting the fiber
- Lay adapters suit for FTTH and easy to operate
- Voltage resistance: 15KV (DC).
- Tensile seal: after the product is inflated, it can withstand the axial tension of 2000N.
- Impact seal: after the product is inflated, can withstand the shock energy of 16N*m (Newton * meters) three times
- The product has no crack, no leak.
- The boxes of the products are made of high quality engineering plastics, and the external fastener and components are made of high-quality stainless steel materials. The product USES two pressure cable technology to ensure that the inside of the box has no added attenuation.
- The product has the function of the electrical connection of the cable.
- The product has many multiplexing and amplifies function.
- The enclosure can be filled with valve mouth * for easy sealing of the juniper check and measurement of air pressure.
- The enclosure may be equipped with an earth extractor.




Working environment :

- Ambient temperature: to 40 °C to + 65°C
- Relative humidity: 85%
- Protection level (EN60529) : IP68.

Applications:

- Suitable for bunchy fibers
- Aerial, underground, wall-mounting, hand hole-mounting and duct-mounting

High Qulaity Splicing Tray:

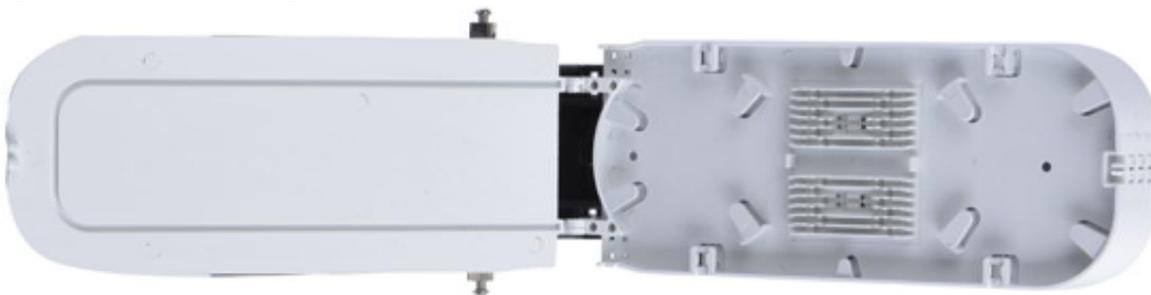

Capacity	12 core	24 core	36 core	48 core	72 core	96 core	144 core
QTY of tray	1pcs	1 pcs	2 pcs	2 pcs	3 pcs	4 pcs	6 pcs

Optional accessories:



hofiber@melontel.com